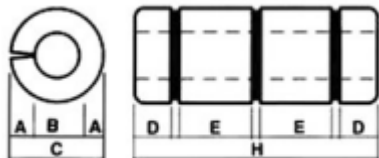


Floating Hoses and Element Specs.

Hose floater Specs																										
Flowsafe floater	(Qty)																									
Net buoyancy	16Kg																									
Weight	2Kg																									
Volume	18dm3																									
Dimension																										
<div></div>																										
<table><tr><th rowspan="2">hose I.D. [inch]</th><th colspan="6">dimensions</th></tr><tr><th>A</th><th>B</th><th>C</th><th>D</th><th>E</th><th>H</th></tr><tr><td>4</td><td>55</td><td>120</td><td>230</td><td>90</td><td>182</td><td>600</td></tr></table>							hose I.D. [inch]	dimensions						A	B	C	D	E	H	4	55	120	230	90	182	600
hose I.D. [inch]	dimensions																									
	A	B	C	D	E	H																				
4	55	120	230	90	182	600																				
4" Hose Specs																										
4" Rigstar hose DN102	400m (20 x 20m length; c/w stainless steel female camlock on one end and male coupling on the other end)																									
Inner layer:	Black NBR rubber																									
Reinforcement:	Synthetic cord, steel helix																									
Outer Layer:	Black CR rubber																									
Work. Temp:	-30 to +85 degree Celsius																									
I.D:	102mm																									
O.D:	118mm																									
Working Pressure	20bar																									
Burst Pressure	60bar																									
Vacuum	0.9bar																									
Bend radius	408mm																									
Breaking load	770Kg																									
Weight	4.66Kg/m																									
Coil length	60m																									